

Pinnacle Impact Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"


	Mas. Opp. Clad	2-8 3/4	4-11 3/4	7-7 3/4	9-9 5/16
	Rough Opp.	2-8 1/2	4-11 1/2	7-7 1/2	9-9 1/16
	Frame	2-8	4-11	7-7	9-8 9/16
	Glass	21 1/4	21 1/4	21 1/4	21 1/4
6-8					
6-8		2668-S	5068-OX	7668-OX/S	10068-OXXO
6-7 1/2					
6-4		26610-S	50610-OX	76610-OX/S	100610-OXXO
6-11					
6-11		2680-S	5080-OX	7680-OX/S	10080-OXXO
6-10 1/2					
6-7					
8-0					
8-0					
7-11 1/2					
8-0					

CLAD UNIT SIZE INFORMATION

- FOR CLAD WM 180 BRICKMOULD
 - ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT*
- FOR CLAD WM 180 SOLID BACK BRICKMOULD
 - ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT*
- FOR CLAD 3 1/2 FLAT
 - ▣ ADD 5 7/8" TO FRAME WIDTH
 - ▣ ADD 2 15/16" TO FRAME HEIGHT*
- FOR CLAD WILLIAMSBURG
 - ▣ ADD 6 1/2" TO FRAME WIDTH
 - ▣ ADD 3 1/4" TO FRAME HEIGHT*

NOTE:
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING

OTHER GRILLE PATTERNS

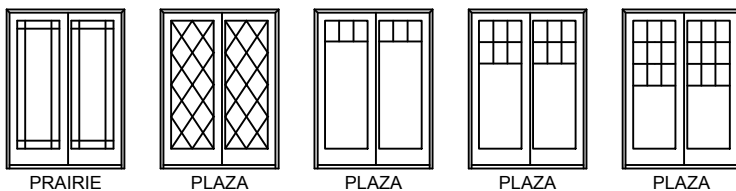

NOTES:
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

Pinnacle Impact Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Clad
Rough Opp.
Frame
Glass


3-2 3/4
3-2 1/2
3-2
27 1/4

5-11 3/4
5-11 1/2
5-11
27 1/4


9-1 3/4
9-1 1/2
9-1
27 1/4

11-9 5/16
11-9 1/16
11-8 9/16
27 1/4


6-8
6-8
6-7 1/2
64




3068-S



6068-OX




9068-OX/S




12068-OXXO


6-11
6-11
6-10 1/2
67




30610-S



60610-OX




90610-OX/S




120610-OXXO


8-0
8-0
7-11 1/2
80




3080-S



6080-OX



9080-OX/S



12080-OXXO

CLAD UNIT SIZE INFORMATION

FOR CLAD WM 180 BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT*

FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT*

FOR CLAD 3 1/2 FLAT

- ▣ ADD 5 7/8" TO FRAME WIDTH
- ▣ ADD 2 15/16" TO FRAME HEIGHT*


FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT*


NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT
TO CALCULATE MASONRY OPENING


OTHER GRILLE PATTERNS




PRAIRIE




PLAZA



PLAZA



PLAZA



PLAZA

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

Pinnacle Impact Series

PATIO DOOR - FRENCH SLIDER

ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Clad Rough Opg. Frame * Glass	4-2 3/4	7-11 3/4	12-1 3/4	15-9 5/16
	4-2 1/2	7-11 1/2	12-1 1/2	15-9 1/16
	4-2	7-11	12-1	15-8 9/16
	39 1/4	39 1/4	39 1/4	39 1/4
6-8 6-8 6-7 1/2 64				
	4068-S	8068-OX	12068-OX/S	16068-OXXO
6-11 6-11 6-10 1/2 67				
	40610-S	80610-OX	120610-OX/S	160610-OXXO
8-0 8-0 7-11 1/2 80				
	4080-S	8080-OX	12080-OX/S	16080-OXXO


CLAD UNIT SIZE INFORMATION

- FOR CLAD WM 180 BRICKMOULD**
 - ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT*
- FOR CLAD WM 180 SOLID BACK BRICKMOULD**
 - ▣ ADD 2 13/16" TO FRAME WIDTH
 - ▣ ADD 1 13/32" TO FRAME HEIGHT*
- FOR CLAD 3 1/2 FLAT**
 - ▣ ADD 5 7/8" TO FRAME WIDTH
 - ▣ ADD 2 15/16" TO FRAME HEIGHT*
- FOR CLAD WILLIAMSBURG**
 - ▣ ADD 6 1/2" TO FRAME WIDTH
 - ▣ ADD 3 1/4" TO FRAME HEIGHT*

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

OTHER GRILLE PATTERNS

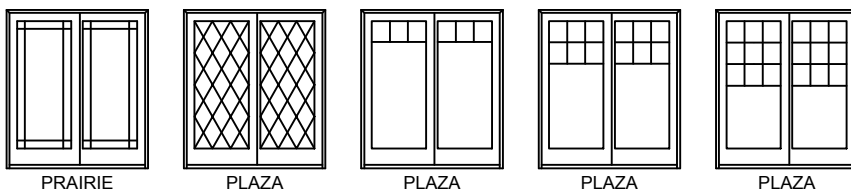

NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING
PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD