

NEXT DIMENSION PRO SERIES

VERTICAL MULL REINFORCEMENT GUIDELINES


MULLION

NOTE: SIZES SHOWN ARE FOR INDIVIDUAL UNIT SIZES WITHIN THE MULLED CONFIGURATION

		WINDOW WIDTH [IN]											
		18	24	30	36	42	48	54	60	66	72	78	84
WINDOW HEIGHT [IN]	18	50	50	50	50	50	50	50	50	50	50	50	50
	24	50	50	50	50	50	50	50	50	50	50	50	50
	30	50	50	50	50	50	50	50	50	50	50	50	50
	36	50	50	50	50	50	50	50	50	50	45	40	35
	42	50	50	50	50	50	45	40	40	35	30	30	25
	48	50	50	50	50	40	35	30	30	25	25	20	20
	54	50	50	45	35	30	30	25	20	20	20		
	60	45	45	35	30	25	20	20					
	66	35	35	30	25	20	20						
	72	30	30	25	20								
	78	25	25	20									
	84	20	20										

- No Reinforcement
- Reinforcement Required
- Exceeds Mulling Limitations

Numbers shown are calculated **STRUCTURAL DP Rating** for the **mull ONLY**.
 Refer to individual unit ratings for structural, air and water performance of the individual unit(s).
 For composite structural rating use the **LOWER** of the mull and unit(s) individual structural ratings.

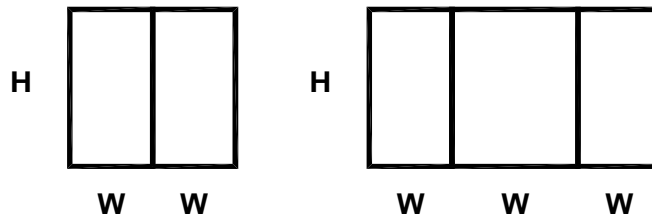

- Notes:
- 1) Use Largest Width (W)
 - 2) Maximum Deflection: Span / 30
 - 3) Rebar Specs: 1/4" x 1 7/8" Steel Bar
 - 4) Overall Mulling Configuration not to Exceed: 108" x 84"