

# Pinnacle Impact Series

## CLAD PATIO DOOR - OUTSWING

### ELEVATIONS

SCALE: 1/8" = 1'-0"


	Masonry Opg.	2-7	5-0 13/16	2-9	5-4 13/16	3-1	6-0 13/16	3-2 1/2	6-3 13/16
	Rough Opg.	2-7	5-0 13/16	2-9	5-4 13/16	3-1	6-0 13/16	3-2 1/2	6-3 13/16
	Frame	2-6 1/4	5-0 1/16	2-8 1/4	5-4 1/16	3-0 1/4	6-0 1/16	3-1 3/4	6-3 1/16
	Glass	20	20	22	22	26	26	27 1/2	27 1/2
6-7 1/2 6-7 1/2 6-7 63 7/8									
		2668	5068	2868	5468	3068	6068	3268	6468
6-10 3/8 6-10 3/8 6-9 7/8 66 3/4									
		26610	50610	28610	54610	30610	60610	32610	64610
7-11 3/8 7-11 3/8 7-10 7/8 79 3/4									
		2680	5080	2880	5480	3080	6080	3280	6480

Masonry Opg. 4-0 9/16  
Rough Opg. 4-0 9/16  
Frame 4-0 1/16  
Glass 14


**NOTE:**  
THE ACTIVE PANEL (X) CAN BE PLACED IN ANY POSITION AND HINGED IN EITHER DIRECTION, LEFT (XL), OR RIGHT (XR). THE REMAINING PANEL(S) MUST BE IN A FIXED POSITION.

6-7 1/2 6-7 1/2 6-7 63 7/8		4068 BI-HINGE ONLY
6-10 3/8 6-10 3/8 6-9 7/8 66 3/4		40610 BI-HINGE ONLY
7-11 3/8 7-11 3/8 7-10 7/8 79 3/4		4080 BI-HINGE ONLY

#### OTHER GRILLE PATTERNS

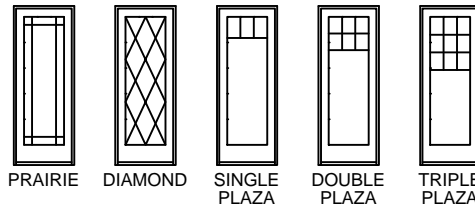

#### OTHER PANEL OPTIONS

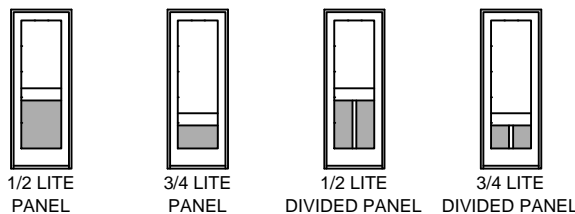

#### UNIT SIZE INFORMATION

- FOR CLAD BRICKMOULD**
- ADD 2 13/16" TO FRAME WIDTH
  - ADD 1 13/32" TO FRAME HEIGHT
- FOR CLAD WILLIAMSBURG**
- ADD 6 1/2" TO FRAME WIDTH
  - ADD 3 1/4" TO FRAME HEIGHT

**NOTE:**  
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

**NOTES:**  
ALL UNITS REQUIRE MULTI-POINT LOCKING HARDWARE  
ALL UNITS LISTED ARE BUILT AS ONE FRAME.  
MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.

# Pinnacle Impact Series

## CLAD OUTSWING PATIO DOOR - IN-SASH TRANSOMS

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Masonry Oppg.	2-7	5-0 13/16	5-0 13/16	2-9	5-4 13/16	5-4 13/16
Rough Oppg.	2-7	5-0 13/16	5-0 13/16	2-9	5-4 13/16	5-4 13/16
Frame	2-6 1/4	5-0 1/16	5-0 1/16	2-8 1/4	5-4 1/16	5-4 1/16
Glass	20	49 13/16	20	22	53 13/16	22
2-0 1/2						
2-0 1/2	2611	5011	5011-2	2811	5411	5411-2
1-4 1/2						
1-4 1/2	2614	5014	5014-2	2814	5414	5414-2
1-1						
1-1	2620	5020	5020-2	2820	5420	5420-2

Masonry Oppg.	3-1	6-0 13/16	6-0 13/16
Rough Oppg.	3-1	6-0 13/16	6-0 13/16
Frame	3-0 1/4	6-0 1/16	6-0 1/16
Glass	26	61 13/16	26
2-0 1/2			
2-0 1/2	3011	6011	6011-2
1-4 1/2			
1-4 1/2	3014	6014	6014-2
1-1			
1-1	3020	6020	6020-2

#### UNIT SIZE INFORMATION

##### FOR CLAD BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

##### FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

##### NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

#### NOTES:

MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.


# Pinnacle Impact Series

## CLAD PANEL DOOR - OUTSWING


GRILLE PATTERNS FOR PANEL DOORS

SCALE: 1/8" = 1'-0"

### 3/4 LITE

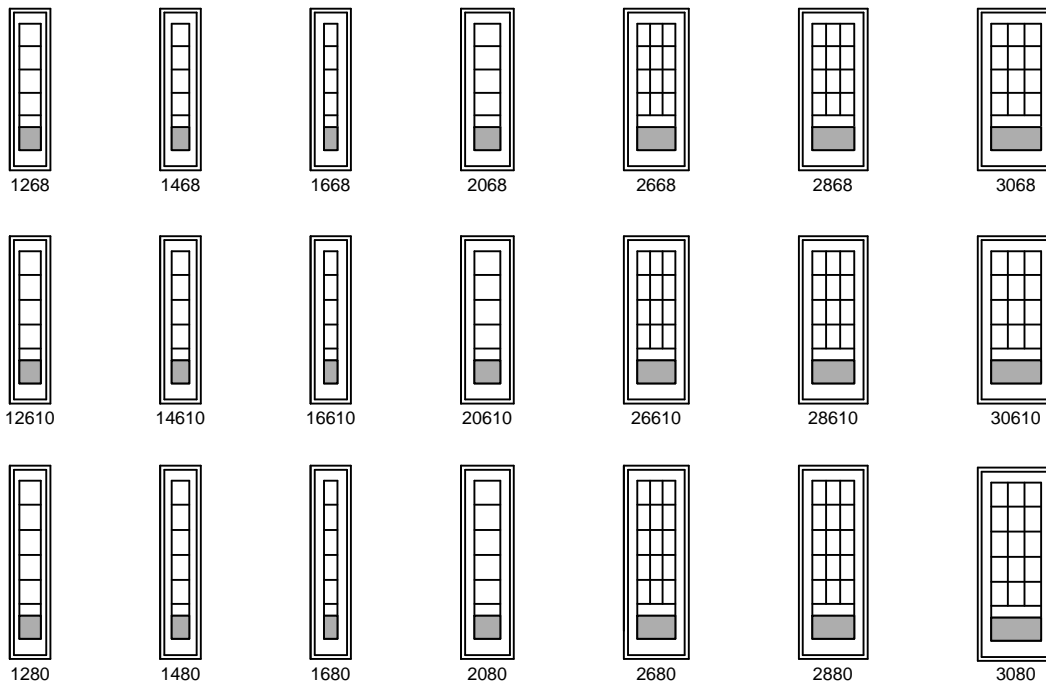

### PANEL HEIGHT & MIDRAIL LOCATIONS

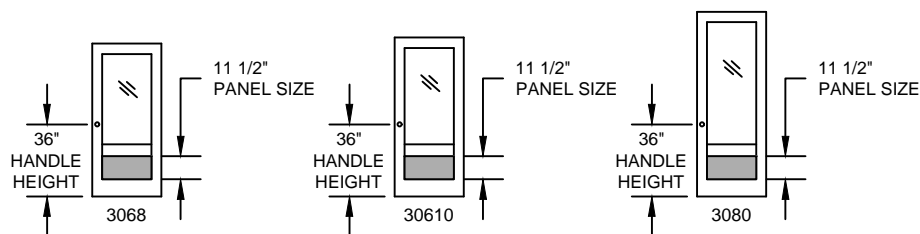

NOTES:  
HORIZONTAL GRILLE BARS WILL ONLY ALIGN WITH SIMILAR PANELS OR SIDE PANELS


# Pinnacle Impact Series

## CLAD PANEL DOOR - OUTSWING


GRILLE PATTERNS FOR PANEL DOORS

SCALE: 1/8" = 1'-0"

### 1/2 LITE

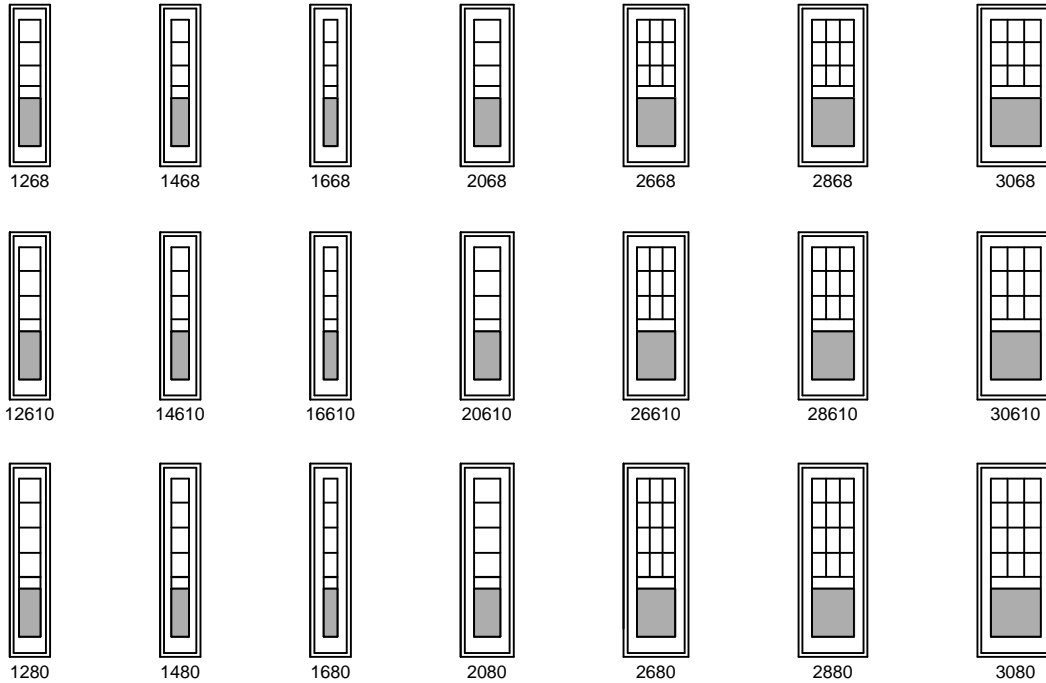

### PANEL HEIGHT & MIDRAIL LOCATIONS

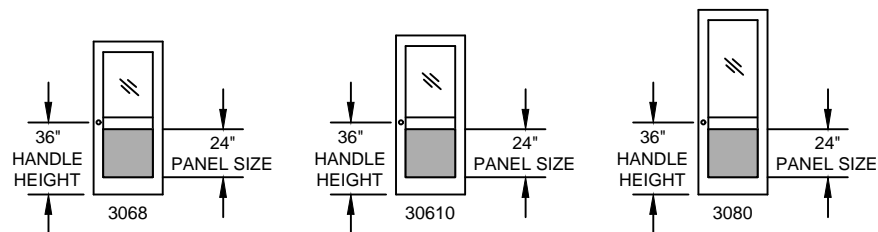

NOTES:  
HORIZONTAL GRILLE BARS WILL ONLY ALIGN WITH SIMILAR PANELS OR SIDE PANELS