

# Pinnacle Series



## CLAD PATIO DOOR - NARROW SLIDER

### ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Clad	2-8 3/4	4-11 3/4	7-7 3/4	9-9 5/16
	Rough Opg.	2-8 3/4	4-11 3/4	7-7 3/4	9-9 5/16
	Frame	2-8	4-11	7-7	9-8 9/16
	Glass	25	25	25	25
6-8	6-8				
	6-7 1/2	2668-S	5068-OX	7668-OX/S	10068-OXXO
	71 3/4				
6-11	6-11				
	6-10 1/2	26610-S	50610-OX	76610-OX/S	100610-OXXO
	74 3/4				
8-0	8-0				
	7-11 1/2	2680-S	5080-OX	7680-OX/S	10080-OXXO
	87 3/4				

### OTHER GRILLE PATTERNS

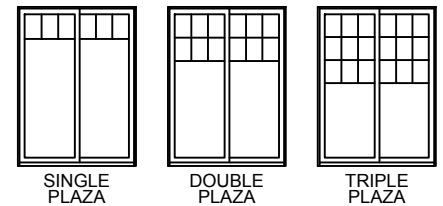

### CLAD UNIT SIZE INFORMATION

FOR CLAD WM 180 BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

FOR CLAD 3 1/2 FLAT

- ▣ ADD 5 7/8" TO FRAME WIDTH
- ▣ ADD 2 15/16" TO FRAME HEIGHT

FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

	Mas. Opg. Clad	3-2 3/4	5-11 3/4	9-1 3/4	11-9 5/16
	Rough Opg.	3-2 3/4	5-11 3/4	9-1 3/4	11-9 5/16
	Frame	3-2	5-11	9-1	11-8 9/16
	Glass	31	31	31	31
6-8	6-8				
	6-7 1/2	3068-S	6068-OX	9068-OX/S	12068-OXXO
	71 3/4				
6-11	6-11				
	6-10 1/2	30610-S	60610-OX	90610-OX/S	120610-OXXO
	74 3/4				
8-0	8-0				
	7-11 1/2	3080-S	6080-OX	9080-OX/S	12080-OXXO
	87 3/4				

NOTES:













CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.

# Pinnacle Series



## CLAD PATIO DOOR - NARROW SLIDER

### ELEVATIONS

SCALE: 1/8" = 1'-0"

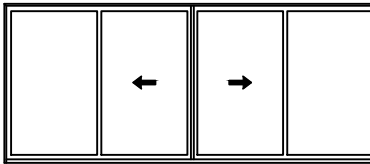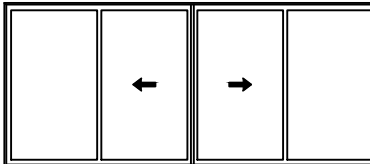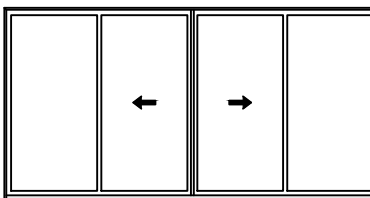	4-2 3/4	7-11 3/4	12-1 3/4	15-9 5/16
Mas. Opp. Clad	4-2 3/4	7-11 3/4	12-1 3/4	15-9 5/16
Rough Opp.	4-2	7-11	12-1	15-8 9/16
Frame	43	43	43	43
Glass				
6-8 6-8 6-7 1/2 7 3/4	 4068-S	 8068-OX	 12068-OX/S	 16068-OXXO
6-11 6-11 6-10 1/2 7 3/4	 40610-S	 80610-OX	 120610-OX/S	 160610-OXXO
8-0 8-0 7-11 1/2 8 3/4	 4080-S	 8080-OX	 12080-OX/S	 16080-OXXO

### OTHER GRILLE PATTERNS

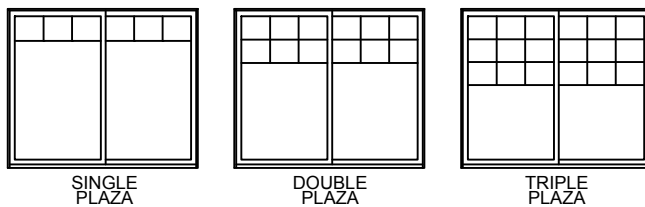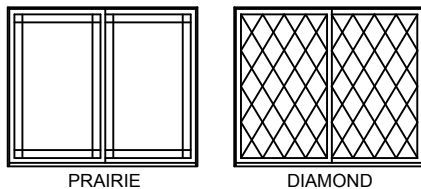

### CLAD UNIT SIZE INFORMATION

#### FOR CLAD WM 180 BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

#### FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

#### FOR CLAD 3 1/2 FLAT

- ▣ ADD 5 7/8" TO FRAME WIDTH
- ▣ ADD 2 15/16" TO FRAME HEIGHT

#### FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

#### NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

NOTES:  
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING.

# Pinnacle Series

## PATIO DOOR - FRENCH SLIDER

ELEVATIONS  
SCALE: 1/8" = 1'-0"

	2-10 3/4	5-1 3/4	7-9 3/4	9-11 5/16
Mas. Opp. Primed	2-8 3/4	4-11 3/4	7-7 3/4	9-9 5/16
Mas. Opp. Clad	2-8 3/4	4-11 3/4	7-7 3/4	9-9 5/16
Rough Opp.	2-8	4-11	7-7	9-8 9/16
Frame	21 1/4	21 1/4	21 1/4	21 1/4
Glass				
6-9 6-8 6-8 6-7 1/2 64	 2668-S	 5068-OX	 7668-OX/S	 10068-OXXO
7-0 6-11 6-11 6-10 1/2 67	 26610-S	 50610-OX	 76610-OX/S	 100610-OXXO
8-1 8-0 8-0 7-11 1/2 80	 2680-S	 5080-OX	 7680-OX/S	 10080-OXXO
9-0 9-0 8-11 1/2 92	 2690-S (CLAD ONLY)	 5090-OX (CLAD ONLY)		 10090-OXXO (CLAD ONLY)
10-0 10-0 9-11 1/2 104	 26100-S (CLAD ONLY)	 50100-OX (CLAD ONLY)		 100100-OXXO (CLAD ONLY)

\* OTHER GRILLE PATTERNS AVAILABLE

CLAD UNIT SIZE INFORMATION

**FOR CLAD WM 180 BRICKMOULD**

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

**FOR CLAD WM 180 SOLID BACK BRICKMOULD**

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

**FOR CLAD 3 1/2 FLAT**

- ADD 5 7/8" TO FRAME WIDTH
- ADD 2 15/16" TO FRAME HEIGHT

**FOR CLAD WILLIAMSBURG**

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

PRIME UNIT SIZE INFORMATION

**FOR PRIMED WM-180**

- ADD 2" TO FRAME WIDTH
- ADD 1" TO FRAME HEIGHT

**FOR PRIMED 3 1/2" FLAT CASING**

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 1/2" TO FRAME HEIGHT

**FOR PRIMED 4 1/2" BACKBAND**

- ADD 7 1/32" TO FRAME WIDTH
- ADD 3 1/2" TO FRAME HEIGHT

**FOR PRIMED 5 1/2" FLAT CASING**

- ADD 9 1/32" TO FRAME WIDTH
- ADD 4 1/2" TO FRAME HEIGHT

**FOR PRIMED WILLIAMSBURG**

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 1/4" TO FRAME HEIGHT

**FOR PRIMED PLANTATION**

- ADD 5 1/32" TO FRAME WIDTH
- ADD 5 1/2" TO FRAME HEIGHT

NOTE:  
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

# Pinnacle Series

## PATIO DOOR - FRENCH SLIDER

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opp. Primed  
Mas. Opp. Clad  
Rough Opp.  
Frame  
Glass


3-4 3/4  
3-2 3/4  
3-2 3/4  
3-2  
27 1/4

6-1 3/4  
5-11 3/4  
5-11 3/4  
5-11  
27 1/4


9-3 3/4  
9-1 3/4  
9-1 3/4  
9-1  
27 1/4

11-11 5/16  
11-9 5/16  
11-9 5/16  
11-8 9/16  
27 1/4


6-9  
6-8  
6-8  
6-7 1/2  
64




3068-S



6068-OX




9068-OX/S




12068-OXXO


7-0  
6-11  
6-11  
6-10 1/2  
67




30610-S



60610-OX




90610-OX/S




120610-OXXO


8-1  
8-0  
8-0  
7-11 1/2  
80




3080-S



6080-OX




9080-OX/S




12080-OXXO

9-0  
9-0  
8-11 1/2  
92




3090-S

(CLAD ONLY)



6090-OX


(CLAD ONLY)



12090-OXXO


(CLAD ONLY)

10-0  
10-0  
9-11 1/2  
104




30100-S

(CLAD ONLY)



60100-OX

(CLAD ONLY)



120100-OXXO

(CLAD ONLY)

#### CLAD UNIT SIZE INFORMATION

##### FOR CLAD WM 180 BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

##### FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ▣ ADD 2 13/16" TO FRAME WIDTH
- ▣ ADD 1 13/32" TO FRAME HEIGHT

##### FOR CLAD 3 1/2 FLAT

- ▣ ADD 5 7/8" TO FRAME WIDTH
- ▣ ADD 2 15/16" TO FRAME HEIGHT

##### FOR CLAD WILLIAMSBURG

- ▣ ADD 6 1/2" TO FRAME WIDTH
- ▣ ADD 3 1/4" TO FRAME HEIGHT

#### PRIME UNIT SIZE INFORMATION

##### FOR PRIMED WM-180

- ▣ ADD 2" TO FRAME WIDTH
- ▣ ADD 1" TO FRAME HEIGHT

##### FOR PRIMED 3 1/2" FLAT CASING

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 2 1/2" TO FRAME HEIGHT

##### FOR PRIMED 4 1/2" BACKBAND

- ▣ ADD 7 1/32" TO FRAME WIDTH
- ▣ ADD 3 1/2" TO FRAME HEIGHT

##### FOR PRIMED 5 1/2" FLAT CASING

- ▣ ADD 9 1/32" TO FRAME WIDTH
- ▣ ADD 4 1/2" TO FRAME HEIGHT

##### FOR PRIMED WILLIAMSBURG

- ▣ ADD 5 17/32" TO FRAME WIDTH
- ▣ ADD 2 1/4" TO FRAME HEIGHT

##### FOR PRIMED PLANTATION

- ▣ ADD 5 1/32" TO FRAME WIDTH
- ▣ ADD 5 1/2" TO FRAME HEIGHT

#### NOTE:

ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT TO CALCULATE MASONRY OPENING

#### NOTES:

CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME WITH NO CASING PRIMED MASONRY OPENINGS ARE FOR STANDARD 180 BRICKMOULD

\* OTHER GRILLE PATTERNS AVAILABLE

# Pinnacle Series


## PATIO DOOR - FRENCH SLIDER

### ELEVATIONS

SCALE: 1/8" = 1'-0"

Mas. Opg. Primed  
 Mas. Opg. Clad  
 Rough Opg.  
 Frame  
 Glass

4-4 3/4	8-1 3/4	12-3 3/4	15-11 5/16
4-2 3/4	7-11 3/4	12-1 3/4	15-9 5/16
4-2 3/4	7-11 3/4	12-1 3/4	15-9 5/16
4-2	7-11	12-1	15-8 9/16
39 1/4	39 1/4	39 1/4	39 1/4

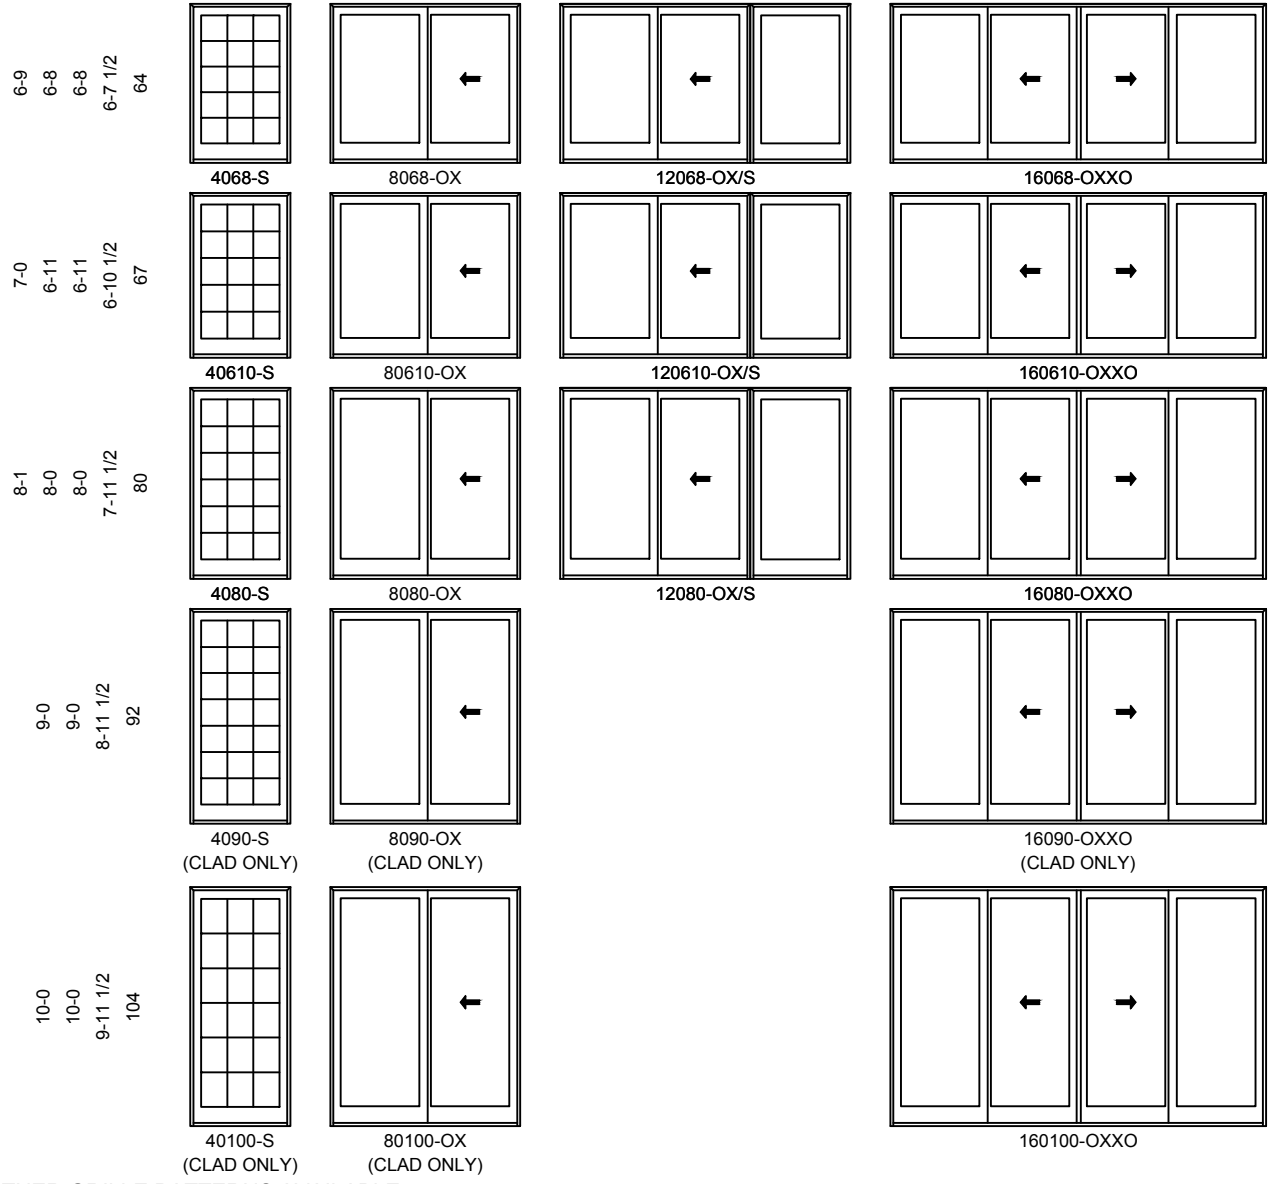

\* OTHER GRILLE PATTERNS AVAILABLE

#### CLAD UNIT SIZE INFORMATION

<p><b>FOR CLAD WM 180 BRICKMOULD</b></p> <ul style="list-style-type: none"> <li>▣ ADD 2 13/16" TO FRAME WIDTH</li> <li>▣ ADD 1 13/32" TO FRAME HEIGHT</li> </ul> <p><b>FOR CLAD WM 180 SOLID BACK BRICKMOULD</b></p> <ul style="list-style-type: none"> <li>▣ ADD 2 13/16" TO FRAME WIDTH</li> <li>▣ ADD 1 13/32" TO FRAME HEIGHT</li> </ul> <p><b>FOR CLAD 3 1/2 FLAT</b></p> <ul style="list-style-type: none"> <li>▣ ADD 5 7/8" TO FRAME WIDTH</li> <li>▣ ADD 2 15/16" TO FRAME HEIGHT</li> </ul> <p><b>FOR CLAD WILLIAMSBURG</b></p> <ul style="list-style-type: none"> <li>▣ ADD 6 1/2" TO FRAME WIDTH</li> <li>▣ ADD 3 1/4" TO FRAME HEIGHT</li> </ul>
--

#### PRIME UNIT SIZE INFORMATION

<p><b>FOR PRIMED WM-180</b></p> <ul style="list-style-type: none"> <li>▣ ADD 2" TO FRAME WIDTH</li> <li>▣ ADD 5 1/32" TO FRAME WIDTH</li> <li>▣ ADD 7 1/32" TO FRAME WIDTH</li> <li>▣ ADD 9 1/32" TO FRAME WIDTH</li> <li>▣ ADD 5 17/32" TO FRAME WIDTH</li> <li>▣ ADD 5 1/32" TO FRAME WIDTH</li> </ul>	<p><b>FOR PRIMED 3 1/2" FLAT CASING</b></p> <ul style="list-style-type: none"> <li>▣ ADD 2 1/2" TO FRAME HEIGHT</li> <li>▣ ADD 3 1/2" TO FRAME HEIGHT</li> <li>▣ ADD 4 1/2" TO FRAME HEIGHT</li> <li>▣ ADD 2 1/4" TO FRAME HEIGHT</li> <li>▣ ADD 5 1/2" TO FRAME HEIGHT</li> </ul>
--	--

NOTE:  
 ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
 TO CALCULATE MASONRY OPENING

NOTES:  
 CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME  
 WITH NO CASING PRIMED MASONRY OPENINGS  
 ARE FOR STANDARD 180 BRICKMOULD

# Pinnacle Series

## PATIO DOOR - DIRECT SET TRANSOMS

### ELEVATIONS

SCALE: 1/8" = 1'-0"

	Mas. Opg. Primed	Mas. Opg. Clad	Rough Opg.	Frame	Glass					
1-2 1/2	2-10 3/4	5-1 3/4	5-1 3/4	5-1 3/4	2611	3011	6011	5011	5011-2	
1-1 1/2	2-8 3/4	4-11 3/4	4-11 3/4	4-11 3/4	2614	3014	6014	5014	5014-2	
1-1 1/2	2-8 3/4	4-11 3/4	4-11 3/4	4-11 3/4	2620	3020	6020	5020	5020-2	
1-1	2-8	4-11	4-11	4-11	3011	6011	6011-2	5011	5011-2	2-5 1/2 2-5 1/2
10	29	56	56	56	3014	6014	6014-2	5014	5014-2	26 1/2 26 1/2
1-5 1/2					3020	6020	6020-2	5020	5020-2	
1-4 1/2										
1-4 1/2										
1-4										
13										
2-1 1/2										
2-0 1/2										
2-0 1/2										
2-0										
21										
1-2 1/2	3-4 3/4	6-1 3/4	6-1 3/4	6-1 3/4	3011	6011	6011-2	5011	5011-2	
1-1 1/2	3-2 3/4	5-11 3/4	5-11 3/4	5-11 3/4	3014	6014	6014-2	5014	5014-2	
1-1 1/2	3-2 3/4	5-11 3/4	5-11 3/4	5-11 3/4	3020	6020	6020-2	5020	5020-2	
1-1	3-2	5-11	5-11	5-11						2-11 1/2 2-11 1/2
10	35	68	68	68						32 1/2 32 1/2
1-5 1/2										
1-4 1/2										
1-4 1/2										
1-4										
13										
2-1 1/2										
2-0 1/2										
2-0 1/2										
2-0										
21										
1-2 1/2	4-4 3/4	8-1 3/4	8-1 3/4	8-1 3/4	4011	8011	8011-2	5011	5011-2	
1-1 1/2	4-2 3/4	7-11 3/4	7-11 3/4	7-11 3/4	4014	8014	8014-2	5014	5014-2	
1-1 1/2	4-2 3/4	7-11 3/4	7-11 3/4	7-11 3/4	4020	8020	8020-2	5020	5020-2	
1-1	4-2	7-11	7-11	7-11						3-11 1/2 3-11 1/2
10	47	92	92	92						44 1/2 44 1/2
1-5 1/2										
1-4 1/2										
1-4 1/2										
1-4										
13										
2-1 1/2										
2-0 1/2										
2-0 1/2										
2-0										
21										

#### CLAD UNIT SIZE INFORMATION

##### FOR CLAD WM 180 BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

##### FOR CLAD WM 180 SOLID BACK BRICKMOULD

- ADD 2 13/16" TO FRAME WIDTH
- ADD 1 13/32" TO FRAME HEIGHT

##### FOR CLAD 3 1/2 FLAT

- ADD 5 7/8" TO FRAME WIDTH
- ADD 2 15/16" TO FRAME HEIGHT

##### FOR CLAD WILLIAMSBURG

- ADD 6 1/2" TO FRAME WIDTH
- ADD 3 1/4" TO FRAME HEIGHT

#### PRIME UNIT SIZE INFORMATION

##### FOR PRIMED WM-180

- ADD 2" TO FRAME WIDTH
- ADD 1" TO FRAME HEIGHT

##### FOR PRIMED 3 1/2" FLAT CASING

- ADD 5 1/32" TO FRAME WIDTH
- ADD 2 1/2" TO FRAME HEIGHT

##### FOR PRIMED 4 1/2" BACKBAND

- ADD 7 1/32" TO FRAME WIDTH
- ADD 3 1/2" TO FRAME HEIGHT

##### FOR PRIMED 5 1/2" FLAT CASING

- ADD 9 1/32" TO FRAME WIDTH
- ADD 4 1/2" TO FRAME HEIGHT

##### FOR PRIMED WILLIAMSBURG

- ADD 5 17/32" TO FRAME WIDTH
- ADD 2 1/4" TO FRAME HEIGHT

##### FOR PRIMED PLANTATION

- ADD 5 1/32" TO FRAME WIDTH
- ADD 5 1/2" TO FRAME HEIGHT

NOTE:  
ADD 3/4" TO UNIT WIDTH & 1/2" TO UNIT HEIGHT  
TO CALCULATE MASONRY OPENING

NOTES:  
CLAD MASONRY OPENINGS ARE FOR STANDARD FRAME  
WITH NO CASING PRIMED MASONRY OPENINGS  
ARE FOR STANDARD 180 BRICKMOULD